

The Measurement Based Quantum Computing Search Algorithm is Faster than Grover's Algorithm

A. Matthew Smith and P. M. Alsing

Air Force Research Lab, Information Directorate, Rome, New York 13440, USA

We find that the Measurement Based Quantum Computing (MBQC) search algorithm on an unsorted list is not the same as Grover's search algorithm (GSA). More importantly, the MBQC search algorithm is exponentially faster than both GSA and its classical counterpart. We develop and describe the numerical formalism we utilize that confirms the MBQC exponential speedup over the GSA and classical search algorithms.

PACS numbers: 03.67.Ac, 03.67.Lx

Introduction.— L. Grover first showed that a speed up over the brute force classical search (CS) of an unsorted list was possible using quantum mechanics. His search algorithm, now known as Grover's search algorithm (GSA) [1] helped to spur interest in all manners of quantum computing due to the enhancement in computational speed over the corresponding classical algorithms. Grover's algorithm takes advantage of a process called amplitude amplification to act simultaneously on the full state vector of quantum amplitudes [1, 2]. It has been shown by C. Zalka [3] that the optimal speedup achievable by amplitude amplification is $\Omega(\sqrt{2^n})$ where 2^n is the number of elements in the unsorted list composed of n -bit strings (CS scales as $\Omega(2^{n-1})$). However, the question remains if GSA is the optimal quantum search procedure for an unsorted list. It has been assumed that the Measurement Based Quantum Computing (MBQC) search method described and implemented on a photonic cluster state by Zeilinger *et. al* [4], is equivalent to GSA. We have found that this is not the case. It is therefore reasonable to expect that the MBQC search algorithm will have a different execution speed than GSA. We find that the MBQC search can be implemented exponentially faster than GSA and CS, with the MBQC search scaling as $\Omega(\log_2 2^n) = \Omega(n)$.

MBQC and its numerical formalism.— MBQC operates by producing highly entangled multi-qubit states called cluster states. Computations are then preformed by a time ordered sequence of measurements on individual qubits in this entangled resource. We construct the cluster state by first forming the Kronecker product of N photons, each initialized to the state $|+\rangle = (|0\rangle + |1\rangle)/\sqrt{2}$.

$$|\psi\rangle = \prod_{i=1}^N |+_i\rangle = |+_1\rangle \otimes |+_2\rangle \otimes \dots \otimes |+_N\rangle. \quad (1)$$

To complete the construction of the cluster state we create the entanglement resource between the qubits by preforming the CZ operation between nearest neighbors. The four CZ operations for the box cluster state

(see Fig. 1a) are shown in (2),

$$|\Psi_{in}\rangle = \prod_{i,j=nn} CZ_{i,j} |\psi\rangle = CZ_{1,2} CZ_{1,3} CZ_{2,4} CZ_{3,4} |\psi\rangle. \quad (2)$$

Here we note that i, j is the label of the control and target qubits respectively in the $CZ_{i,j}$ operation which is a 4×4 matrix with entries $(-1)^{b_i b_j}$ for the binary computational basis entries $b_i b_j \in \{0, 1\}$. In (2) nn is a list of all nearest neighbors. The $CZ_{i,j}$ operations create the $n \times m$ rectangular cluster state resource the MBQC search requires with $N \equiv nm$ qubits. An algorithm, or any com-

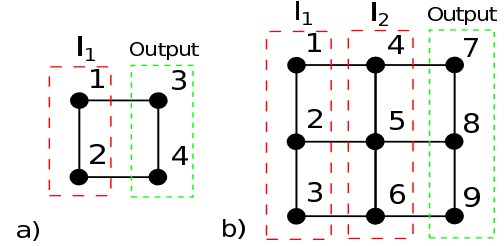


FIG. 1: **Square cluster states.** Two cluster states able to perform an unsorted search on a) $2^2 = 4$ elements using $|\Psi_{box}\rangle$ and on b) $2^3 = 8$ elements using $|\Psi_{C9}\rangle$. Each circle is a single qubit initialized into the $|+\rangle$ state. The lines connecting neighboring qubits indicate the action of an entangling CZ gates. I_1 and I_2 are MBQC iterators on columns of qubits.

putation, then proceeds as a series of single-qubit measurements in which the bases for the subsequent set of measurements is determined by the outcomes of the prior measurements. This can be considered an ordered series of Kronecker products of single qubit rotations yielding a factorizable unitary matrix. Equivalently, we may rotate the measurement bases. For the MBQC search algorithm we require only the discrete set of rotations of $S = \{0, \pi\}$. This implies we are measuring each qubit in the basis $|\pm_s\rangle = (|0\rangle \pm e^{is}|1\rangle)/\sqrt{2}$, i.e. the standard $|\pm\rangle$ basis for $S = 0$ or the $|\mp\rangle$ basis for $S = \pi$.

The MBQC search proceeds by implementing sets of measurements (iterators) on m vertical columns each consisting of n qubits, on a general $n \times m$ cluster state. The iterative measurements act sequentially from left to right on the $(m - 1)$ columns, leaving the last (i.e. right-

most) $n \times 1$ column in the output state. Since the single-qubit measurements can be performed simultaneously, we consider the set of measurements on a single column of qubits to be one operation (iteration) in terms of computation time (iteration counts). The number of elements 2^n in the search list is determined by the “vertical” size n of the cluster state grid. The speed of the algorithm is completely determined by the “horizontal” length of the cluster state grid, or more specifically by the number of columns m in the cluster state grid and therefore is equal to the number of sequential iterators. Thus, the question of the execution speed of the MBQC search is reduced to the identification of the minimum length m of the cluster state of width n required to produce a particular solution state to the search problem. In this work we find that a solution state can be found using $m = n$ vertical columns.

Numerically, each single qubit measurement $B(\alpha)$ is a product of a rotation matrix $R(\alpha)$ times a Hadamard matrix H , $B(\alpha) = R(\alpha) H$ where

$$R(\alpha) = \begin{pmatrix} \cos(\alpha/2) & i \sin(\alpha/2) \\ i \sin(\alpha/2) & \cos(\alpha/2) \end{pmatrix}, H = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}. \quad (3)$$

The unitary matrices that implement the measurement based search algorithm takes the following forms for the two search sizes shown in Fig.(1),

$$\begin{aligned} U_{box} &= B_1(\alpha) \otimes B_2(\beta) \otimes H_3 \otimes H_4 \\ U_{C9} &= B_1(\alpha) \otimes B_2(\beta) \otimes B_3(\gamma) \otimes \\ &\quad B_4(a) \otimes B_5(b) \otimes B_6(c) \otimes H_7 \otimes H_8 \otimes H_9. \end{aligned} \quad (4)$$

The output state of the calculation is then,

$$|\Psi_{out}\rangle = U|\Psi_{in}\rangle, \quad (5)$$

a vector of size 2^N . $|\Psi_{out}\rangle$ can be divided into 2^{N-n} sections of size 2^n , each of which correspond to a set of specific measurements outcomes on the m columns of n qubits. In the first section of 2^n elements of $|\Psi_{out}\rangle$, each of the prior $n(m-1)$ qubits have been projected “correctly” into the state $|+_s\rangle$ (i.e $|+\rangle$ for $s=0$, and $|-\rangle$ for $s=\pi$) for their given value of s (i.e. $|\Psi_{out}\rangle = |+_s\rangle_1 \otimes \dots \otimes |+_s\rangle_{N-n} \otimes |\psi_{out}\rangle_{(N-n)+1, \dots, N}$ where $|\psi_{out}\rangle_{(N-n)+1, \dots, N}$ is the output state on the last column of n qubits) yielding the output for the MBQC search algorithm. Each of the remaining segments, each of size 2^n , correspond to “incorrect results” in which one or more of the $n(m-1)$ qubits has been projected into the $|_s\rangle$ for their given value of s . However, like any MBQC algorithm these errors are known and they can be corrected during or after the calculation with polynomial resource overhead [5, 6]. The essential point is that these “incorrect outputs” are calculable and can be trivially mapped back into the correct output based on the measurement outcomes for any size system. Therefore, we can assume without loss of generality that the single

qubits measurements all give the “correct” output. This eliminates the need to deal with trivial feed forward corrections at the end of the algorithm. We can apply the projection matrix $P = |+_s\rangle\langle+_s|$ to each measurement. The measurement operations for the 4 qubit box, (4) is then,

$$P = \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}, U_{box} = PB_1(\alpha) \otimes PB_2(\beta) \otimes H_3 \otimes H_4, \quad (6)$$

This projective operation populates the unitary matrix U_{box} with the non-zero values in the first 2^n rows and zeros in the rest of the matrix. This is convenient for calculations involving large cluster states for which the use of dense matrices of size $2^N \times 2^N$ is computational expensive. We can simply assume the measurements in the MBQC scheme proceed “correctly” and truncate the matrix to size $2^n \times 2^N$. Note that U is unitary in the absence of the projection matrix P . We sample the 2^n output by simply rotating the output qubits, the last n qubits, to the $|\pm\rangle$ basis. This is equivalent to performing a simple Hadamard on each output qubit and measuring.

Tagging by the Oracle.— In GSA the tagging operation, which is performed by the oracle, is a unitary transform which flips the phase of a the solution element. Here we consider searching for a unique element in a $2^3 = 8$ element list. This tagging operation forms half of the Grover iterator. The tagging is one to one, i.e. there is a single unique tag for each and every element in the search space. In order for the inversion about the mean to take place the oracle must continue to apply the same tagging operation at each step (iteration) of the search.

The MBQC search is unique only up to overall phases such as $\pm$ signs and factors of i , and the final output states can be degenerate. For the 8 element search on a 3×3 grid of qubits, the the final possible measurement outcomes on the last column of 3 qubits are 8 fold degenerate (ignoring overall phases). In the special case of the 4 element search implemented on a 2×2 grid of qubits, the 4 tagging operations are one-to-one with 4 search elements. We have found that a one-to-one property associating a tagging operation to a unique output state does not scale with the size of the cluster state.

The MBQC search can be implemented successfully for any n with a constant (i.e. fixed) iterator [7]. The ($n=3$) $2^n = 8$ element search on 9 qubits arranged on a 3×3 grid can be implemented with an iterator composed of three measurements $a, b, c \in \{0, \pi\}$. This iterator would be applied twice to the two columns of 3 qubits, i.e. (a, b, c ; a, b, c) on qubits (1,2,3 ; 4,5,6) respectively. However, this is not a necessary condition, and the MBQC search could instead be performed with an iterator that varies between measurement iterations [7].

From Raussendorf, Browne and Briegel [8] we learn that the MBQC algorithm can be broken into a series of projective measurements and entangling operations.

This can be seen in the following relation,

$$(P_2 D_2)(P_1 D_1) = (P_2 P_1)(D_2 D_1). \quad (7)$$

Here $\{P_i\}$ is a set of n qubit projective measurements, thus removing a column of qubits, and $\{D_i\}$ is a set of entangling operations [8] acting on the logical state and adding new qubits to the cluster state. The key point to note is that the D_i 's commute with the P_k 's.

We used this feature in our calculation of larger cluster state such as the 81 qubit cluster state (512 element search).

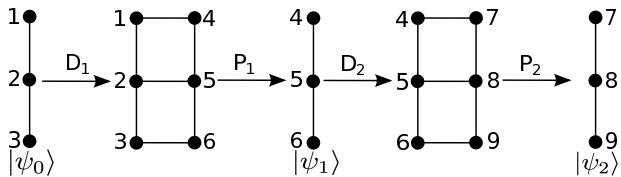


FIG. 2: **Schematic of piecewise cluster state implementation.** Cluster state map and effective pure state vector in MBQC algorithm (see text for description).

In the $(n = 3)$ 2^3 element MBQC search implemented on a 3×3 grid of qubits illustrated in Fig. (2), the first three qubits 1,2,3 are initialized into the $|+\rangle$ state yielding the unbiased state $|\psi_{init}\rangle$. Subsequently, the qubits are CZ -entangled with each other, yielding the pure state $|\psi_0\rangle = CZ_{1,2}CZ_{2,3}|\psi_{init}\rangle$. $|\psi_0\rangle$ is the initial system pure state of the MBQC search algorithm at iteration $k = 0$, and is the three qubit linear cluster state $|C3\rangle$ [7]. The MBQC search iterator then begins its first iteration ($k = 1$) by effectively entangling $|\psi_0\rangle$ with qubits 4,5,6, which are also begin in the $|+\rangle$ state, and are themselves CZ -entangled with each other, i.e. D_1 . This creates a $2 \times n$ cluster state, similar to the butterfly state [9]. The qubits 1,2,3 are then projectively measured, i.e. P_1 . This leaves a three qubit state on 4,5,6 which we denote as $|\psi_1\rangle$, the three qubit system pure state after one iteration ($k = 1$) of the algorithm. In the next iteration ($k = 2$) the state $|\psi_1\rangle$ is entangled with three new qubits 7,8,9, identically to the previous step. For clarity we call this unitary operation D_2 . It is important to note that qubits 4,5,6 are then measured, P_2 , and the logical pure state $|\psi_2\rangle$ is contained in qubits 7,8,9. The projective operations P_i are simply the three qubit projective iterators discussed above, and the D_i are the piecewise construction, i.e. entanglement, of the cluster state shown in Fig. (2). Qubits 7,8,9 need not exist when qubits 1,2,3 are measured since the quantum information is entirely stored in 4,5,6. This has particular relevance to cluster states constructed from “flying” qubits. The significance is that no more than $2n$ qubits need ever be present simultaneously. This constitutes a significant advantage for the photon-based MBQC architectures, especially since the creation of large photonic cluster states is currently limited by the difficulty inherent in producing larger numbers of on-demand single photons.

Algorithm Speed.– The speed of the classical search on an unsorted list is known to be $\Omega(2^{n-1})$. Grover’s algorithm improves upon this lower bound by performing amplitude amplification. Grover’s algorithm is in essence a vector rotation from an unbiased state to a desired target state and scales as $\Omega(\sqrt{2^n})$ [1]. This quadratic improvement in speed was shown to be optimal for a generalized amplitude amplification method by Zalka [3]. The MBQC search algorithm does not apply amplitude amplification since it utilizes non-reversible projective measurements [2].

We now need to determine the “length” of the cluster state m in terms of the “width” n . To date, there exists only one experimental (photonic) implementation of the MBQC search algorithm. This was performed by Zeilinger *et al.* [4] for the trivial $n = 2$, 4 element search utilizing the box cluster state in Fig.(1a), i.e. $m = n = 2$. For larger searches $n \geq 3$ there is in principle no upper limit to the length of the computation m . However, our numerical simulations find that this is not the case. Instead, we find that for any width n the cluster state must be exactly n columns long. The MBQC search requires square cluster states; $n - 1$ measurement iterations (columns) acting on exactly n qubits at each iteration, and one (last) column for the output measurement, yielding $m = n$. This result has been numerically tested

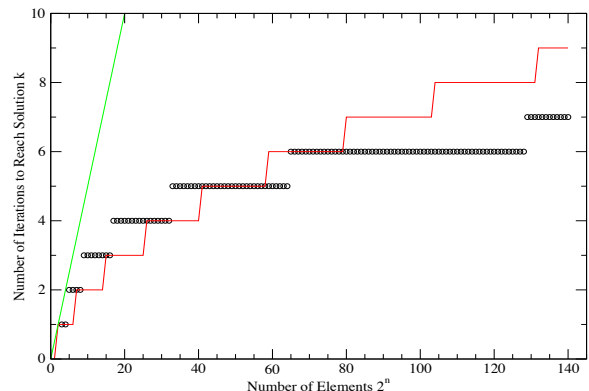


FIG. 3: **Number of iterations (Color Online).** The number of elements in an unsorted vector and the number of iterations required for three search algorithms. The classical 2^{n-1} search (straight green line), the standard grover’s algorithm estimate of $\lfloor (\pi/4)\sqrt{2^n} \rfloor$ (red line) and the MBQC search algorithms $\text{Log}_2 2^n$ (black circle). Searches which are not powers of $N \neq 2^n$ are implemented on the next larger cluster state, $N \leq 2^n$ by ignoring the unneeded elements. This is what leads to the step like shape of the MBQC curve.

for 2^n elements from $n = 2 \rightarrow n = 9$. The $(n = 9)$ $2^9 = 512$ element MBQC search requires 81 total qubits, 72 single qubit measurements and up to 72 post rotations. Such a large cluster state is currently physically unrealizable. Our numerical results show that this cluster state takes only $n - 1 = 8$ applications of the MBQC iterator. Grover’s method requires $\lfloor (\pi/4)\sqrt{2^9} \rfloor \approx 17$ applications of the amplitude amplification iterator (where

$\lfloor x \rfloor = \text{floor}(x)$). This result is reflected in figure (3) where the abscissa has been truncated to maintain clarity for the more interesting smaller element sizes.

Two questions remain; why does the MBQC search not give a solution for $m < n - 1$ iterations, and what happens when $m > n$? To empirically answer the first we return to the observation that the MBQC search cannot be an amplitude amplification method [2, 7]. Our empirical results suggest that the MBQC search is more akin to a binary decision or search tree. The oracle directs the search through the binary tree (from root to leaf) based on the oracles application of the tagging operation [7]. Each single qubit measurement adds a layer to the binary tree. In the $n = 2$ case there are 2 measured qubits giving 4 possible measurements on qubits 1 and 2 respectively $(0, 0)$; $(0, \pi)$; $(\pi, 0)$; (π, π) . As both qubits are in the same column we can measure them simultaneously. The $n \geq 3$ case is more complex, one might assume that a 3×2 (width $\times$ length) qubit cluster state, the so called butterfly cluster state [9], might be sufficient. We have $2^3 = 8$ target states and one might suspect that only 3 “decisions” (single-qubit measurements) are required to find the tagged state logarithmically. This is not the case. We have tested the 3×2 cluster state numerically and find that the output state of such a cluster has uniform amplitude for any tag, and is therefore effectively random. This behavior holds for any n and m if the cluster state is shorter than it is wide, $m < n$.

The 3×3 qubit cluster state ($n = 3$) from Fig. (1b) does give a single target output state with probability 1. This is somewhat surprising as we have $n(n - 1) = 6$ “binary” measurements to select a solution amongst $2^3 = 8$ distinct solution elements. In this case the $2^6 = 8 \times 8$ possible output states are exactly 8 fold degenerate (up to overall phase). In addition we find that to obtain a solution element, one only needs n of the $n(n - 1)$ measurements to be variable, i.e. take values $S \in \{0, \pi\}$, with the remaining fixed at $S = 0$ [7]. In this sense, we have 2^n distinct tags selecting between 2^n distinct solution states, similar to the trivial $n=2$ case. We find all of these discussed behaviors scale with n , at to at least the upper limit $n = 9$ of our computational investigations.

TABLE I: The tagged search element in the decimal basis and the number of iterations at which it is reached. Column I_2 is the same as Fig. (1b) and Fig. (2).

Iterator	I_2	I_6	I_{10}	I_{14}	I_{18}
0,0,0	1	1	1	1	1
0,0, π	-7	2	7	-2	-7
0, π ,0	8	-3	8	-3	8
0, π , π	-2	-4	2	4	-2
π ,0,0	-4	5	4	-5	-4
π ,0, π	6	6	6	6	6
π , π ,0	-5	-7	5	5	-5
π , π , π	3	-8	3	-8	3

When m is larger than n we find an interesting cyclic behavior. Unlike GSA which cycles between the target state and an unbiased state, we find that the MBQC search behavior varies significantly. For a given tag, the desired MBQC target state will be produced at iteration $k = n - 1$. Afterwards, for some tags, the desired target state will be produced every $n + 1$ iterations. For other tags, the states cycle every $n + 1$ iterations between the target state and a second distinct valid output state. Table (I) shows the chosen iterator for the case $n = 3$ and the resulting tagged element from 1 to 8, including phases at the output of each cycle. Thus each column requires a different length cluster state of $3 \times$ (number of iterations), plus one output column. In Table (I) the iterators $(0,0,0)$ and $(\pi, 0, \pi)$, corresponding to target states 1 and 6 respectively, give output elements that are always the same. The remaining tags cycle between between two n -qubit separable target states. The precise cause of this cyclic behavior is a topic warranting further investigation.

Conclusion.— We have performed numerical investigations of a search on an unsorted list of 2^n elements using a MBQC approach that generalizes the experimentally confirmed 4 element search performed by Zeilinger *et al.* [4]. Our results lead to the empirical conclusion that the MBQC search algorithm is not Grover’s Algorithm. More significantly, the speed of the two search algorithm are very different, with the MBQC search providing an exponential speedup over Grover’s Algorithm. That is, for a 2^n element search, Grover’s search algorithm requires $\Omega(2^{n/2})$ applications of the Grover iterator acting on n -qubits. For the MBQC algorithm acting on n^2 qubits, only $n - 1$, i.e. $\Omega(n)$ applications of the MBQC iterator are required, acting on n -qubits at each iteration.

This work was supported in part by the NRC Research Associateship program at the AFRL, and AFOSR. We are gratefully for useful discussions with M. Fanto, D. B. Uskov, and J.R. McDonald. Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of AFRL.

-
- [1] L. Grover, Proc. 28th annual ACM Sym. on Theory of Comp. (STOC) pp. 212–219 (1996).
 - [2] G. Brassard, P. H. yer, M. Mosca, and A. Tapp, Quant. Comp. and Quantum Info.: A Millennium Volume **305** (2002).
 - [3] C. Zalka, Phys. Rev. A **60**, 2746 (1999).
 - [4] P. Walther and *et. al*, Nature **434**, 169 (2005).
 - [5] M. A. Nielson and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge Univ. Press, N.Y., 2000).
 - [6] D. E. Brown and H. J. Briegel, “One-way Quantum Computation” in *Lectures on Quantum Information* (eds. D. Bruß and G. Leuchs, Wiley-VCH, N.Y., 2007).
 - [7] A. M. Smith and P. M. Alsing, arxiv:1211.1307 (2012).

- [8] R. Raussendorf, D. E. Browne, and H. J. Briegel, Phys. Rev. A **68**, 022312 (2003).
- [9] S. Y. Ma and *et. al*, Optics Comm. **283**, 497 (2010).